

技术参数：


频率范围 (-3dB) :	60Hz~18kHz
频率范围 (-10dB) :	35Hz~20kHz
频率范围 (+3/-6dB) :	40Hz~20kHz
额定阻抗 :	LF:8 ohm/MF:4ohm/HF:4ohm
功率 :	LF:1600W/MF:600W/HF:600W
灵敏度(1W@1M) :	LF:100dB/MF:100dB/HF:105dB
峰值声压级1 :	143dB
覆盖角 :	水平: 120° 垂直: 45°
外形尺寸(HxWxD) :	LF:650x430x320mm(x4) MF:1240x130x152mm HF:1260x130x152mm
净重 :	LF:27.5kg(x4)/MF:11.0kg/HF:14.5kg
	可分拆式安装



1: 使用12dB峰值因子粉红噪声信号测试得到, 半自由场。

覆盖角度：

Horizontal 1/3 Octave Polars

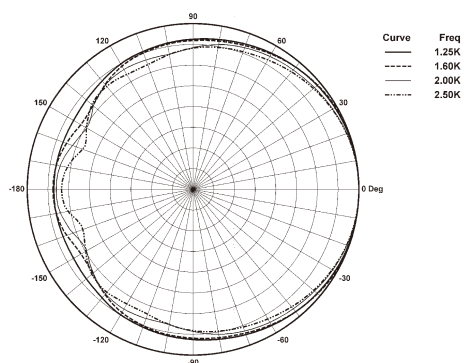

Vertical 1/3 Octave Polars

